



ENMON
NORTH AMERICA

POINT GREY
■ SPC VINYL COLLECTION

POINT GREY

■ SPC VINYL COLLECTION

Point Grey Collection is inspired by the West Coast iconic coastal lifestyle and features the newest innovation in floor surface technology, blending natural elements of lime stone powder and virgin pvc. This flooring brings out that subtle yet irreplaceable beauty of hardwood, in a variety of relaxed yet sophisticated shades. Not only is it 100% waterproof and fire resistant, but it also provides dimensional stability, durability, and impact resistance up to 20 times that of current laminate flooring technology. It's crafted look of natural wood and texture with micro beveled edges gives this product the luxurious appearance of solid hardwood flooring. Attached underlayment not only saves installation time but also provides acoustical benefits in the same room, a floor below and gives comfort under foot. Total thickness of 5.5 mm with 0.5 mm wearlayer is above the average in its category making this product suitable not only for any residential application but also commercial.

The Point Grey Collection sets the benchmark for all others in terms of high sense of design, quality crafted materials, extra comfort and durability.



POINT GREY

■ SPC VINYL COLLECTION

DETAIL OF TOLMIE



TOLMIE



JERICO



LOCARNO



BELMONT



BELLEVUE



HIGHBURY



SASAMAT



TRIMBLE



ALMA



BLANCA



SPC VINYL

■ FLOORING FEATURES & BENEFITS

Our SPC Engineered Flooring is the newest generation of flooring for residential and commercial projects.

Stone Polymer Composite (SPC), the newest technology in the vinyl flooring industry. SPC rigid vinyl flooring, also known as Rigid Vinyl Plank is based on a high tech development of a new environmentally friendly flooring which is 100% formaldehyde free.

Unlike other vinyl flooring, SPC rigid vinyl plank is produced with 100% virgin PVC. The main contents of SPC Rigid Flooring are natural limestone powder, polyvinyl chloride. It has incredible strength, rigidity and it is water resistant.

- **BEAUTY**
- **STRENGTH**
- **DURABILITY**
- **WATER RESISTANT**
- **EASY TO INSTALL**






APPLICATION OF POINT GREY - HIGHBURY

SPC VINYL

COMPOSITION

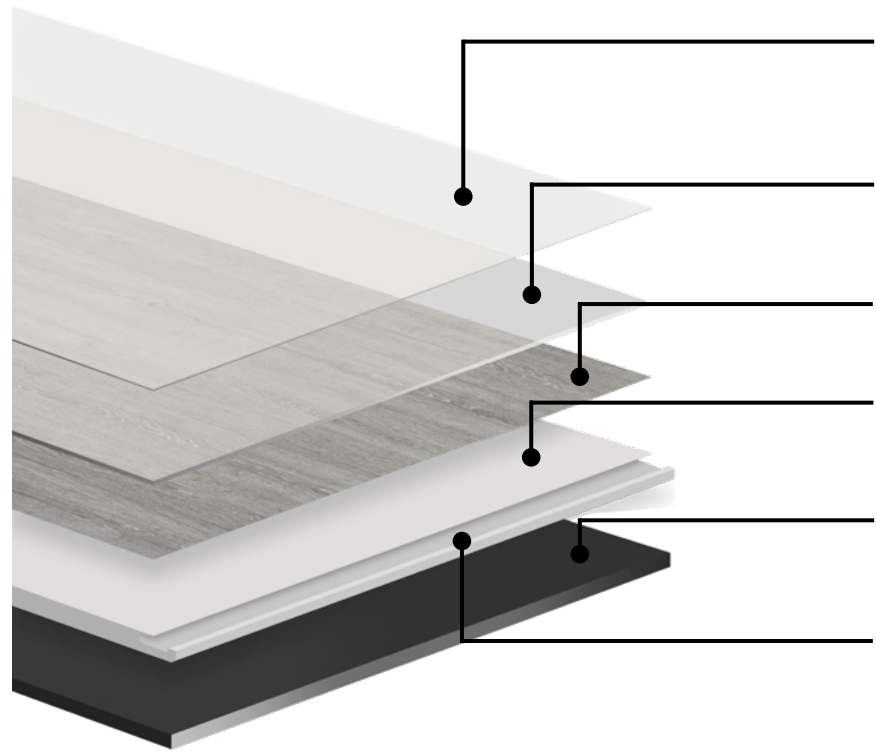

UV COATING LAYER

- ANTI-ULTRAVIOLET
- ANTI-CORROSION
- ANTI-AGING

WEAR LAYER

- SUPERIOR WEAR RESISTANCE
- SUPERIOR STAIN RESISTANCE
- SUPERIOR DURABILITY

DECOR LAYER

- 9 COLORS AVAILABLE
- EXCLUSIVE DESIGN

SPC CORE LAYER

- HIGH DENSITY EXTRUDED SPC BOARD
- 100% WATERPROOF
- LIFETIME STABILITY

IXPE BACK LAYER

- SOUND RESISTANT
- MOISTURE RESISTANT
- MOLD AND MILDEW RESISTANT

UNILIN CLICK SYSTEM

- NO GLUE INSTALLATION
- ENHANCES THE BONDING FORCE OF FLOOR



CERTIFIED



WATERPROOF



PET PROOF



100% RECYCLABLE



PHTHALATES FREE



CLICK SYSTEM

PACKAGING INFO

COLLECTION	Product Code	Product Name	Plank Size (inches)	Square Feet per Box	Pieces per Box	kg per Box	Boxes per Pallet	Pallet
POINT GREY	EN210601	Point Grey Locarno	7x48	28.37sqft	12	22.38 kg	55	1,574.77 sqft
	EN210604	Point Grey Alma	7x48	28.37sqft	12	22.38 kg	55	1,574.77 sqft
	EN210605	Point Grey Jerico	7x48	28.37sqft	12	22.38 kg	55	1,574.77 sqft
	EN210606	Point Grey Tolmie	7x48	28.37sqft	12	22.38 kg	55	1,574.77 sqft
	EN210612	Point Grey Belmont	7x48	28.37sqft	12	22.38 kg	55	1,574.77 sqft
	EN210613	Point Grey Sasamat	7x48	28.37sqft	12	22.38 kg	55	1,574.77 sqft
	EN210618	Point Grey Highbury	7x48	28.37sqft	12	22.38 kg	55	1,574.77 sqft
	EN210624	Point Grey Blanca	7x48	28.37sqft	12	22.38 kg	55	1,574.77 sqft
	EN210625	Point Grey Trimble	7x48	28.37sqft	12	22.38 kg	55	1,574.77 sqft
	EN210627	Point Grey Bellevue	7x48	28.37sqft	12	22.38 kg	55	1,574.77 sqft

SPECIFICATIONS	DATA
Product description	Stone Polymer Composite (SPC) rigid vinyl flooring
Standards	ASTM F1700, Class III, Type B
Plank Size	7"x48" (Width 180mm x Length 1220 mm)
Total Thickness	5.5 mm (4 mm CORE +1.5 IXPE underlay)
Wear Layer	0.50 mm (20mil); suitable for residential and light commercial applications
Packaging	12 planks per box / 55 boxes per pallet
Coverage	2.635/m2 (28.37 sq ft) per box
Weight	21.68 kg (47.80 lbs) per box
Surface Finish	BP-Textured / Real wood, UV Protection : No Wax, No Spray Buff, for the life of the product
Edge Profile	4 side micro bevel
Squareness, Flatness, Openings, Ledging	ASTM F3261-17 (section 7.4, 7.5, 7.6, 7.7) ISP24337:2006: Pass
Residual Indentation	ASTM F3261 (section 8.1) ASTM F1914-17: Pass
Surface Integrity	ASTM F3261-17 (section 8.2) ASTM F1914-17: Pass
Dimensional Stability and Curling	ASTM F3261-17 (section 8.3) ISO 23999:2008: Pass
Chemical and Stain Resistance	ASTM F3261-17 (section 8.4) ASTM F925-13: Pass
Resistance to Heat	ASTM F1514-03 (2013): Pass
Resistance to Light	ASTM F1515-15: Pass
Density	ASTM D792-13, Method A: Pass
Static Load Resistance	ASTM F970-17: Pass
Abrasion Resistance/Wheel Castor Resistance	ASTM D4060-14: Pass
Indoor Air Quality/VOC Emissions	Phthalate Free, Compliant with FloorScore Requirements
Recycling	100% Recyclable
Plant Certifications	ISO 9002, ISO 14001, OHSAS 18001
Health and Safety	Compliant with CE regulations
Installation	Unilin Locking Technology, Click Floating Acoustic Installation System Suitable for radiant heated floors max 28 C (82 F)
Warranty	Residential 25 Year / 5 Year Light Commercial



www.enmon.ca